

FLBPT24



MATERIAL:

Element construction: precast reinforced concrete C35/45
 Surface construction: sandblasted concrete
 -alternative: resin coating / trowel for concrete
 Riding surface: Sika impregnation

CONNECTING MATERIAL:


Connecting bolts: M16 - galvanized, stainless steel (strenght 8.8)
 Mounting holes: M16 - part of the shippment (strenght 8.8)

JOINT FILLER :

Flexible sealant SIKAFLEX PRO 3 (change of sealant after the approval of the manufacturer)

CONNECTION COVER:

All connection points must be covered with soil, except for the back-parts of elements T2, T3 and T4.

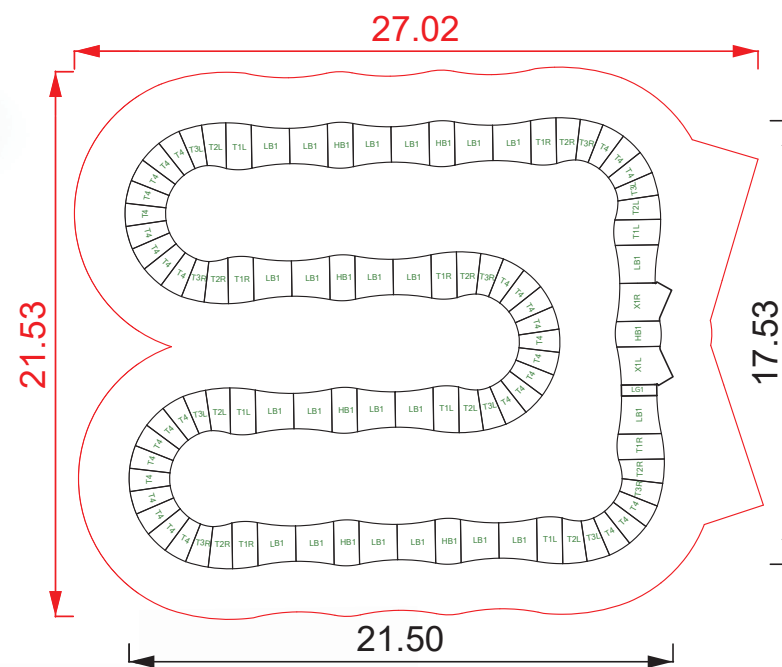


Rideable surface lenght: 94m

T1L+R		5+5
T2L+R		5+5
T3L+R		5+5
T4		33
LB1		22
HB1		7
HB2		0
X1+X2L/R		1+1
LG1		1

Colors

 Ral 7035 precast

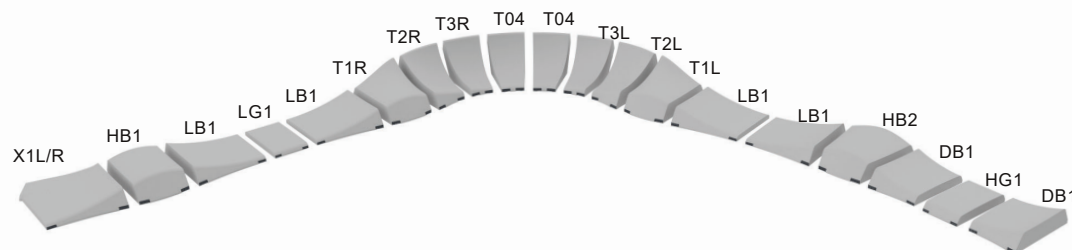

PARKITECT®

Parkitect AG

Reutenenstrasse 22

9042 Speicher, Switzerland

info@parkitect.ch

MWSt - CHE-106.823.064