
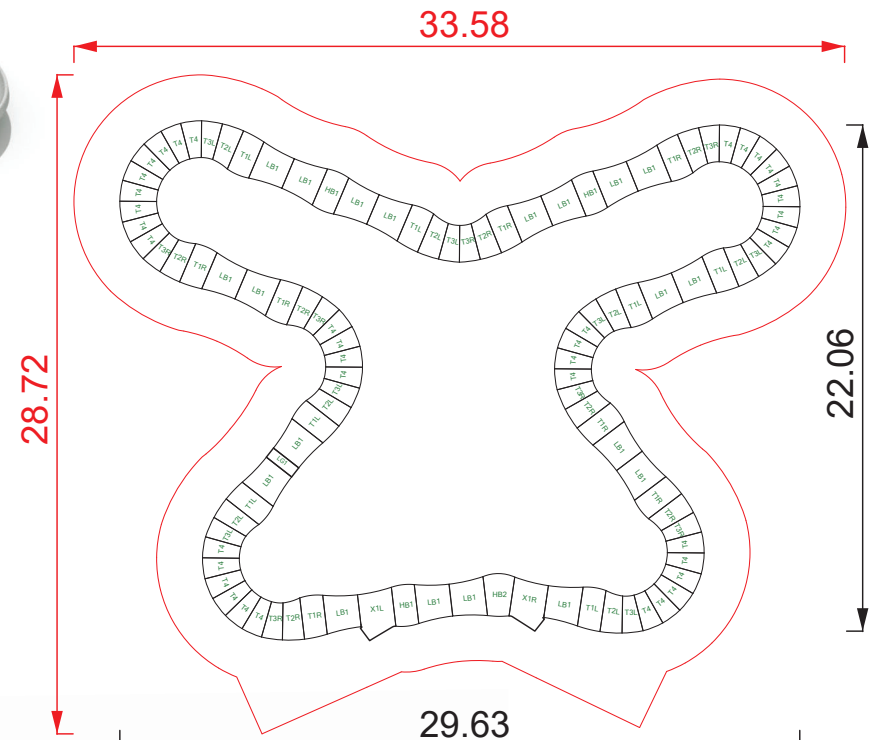


FLBPT26

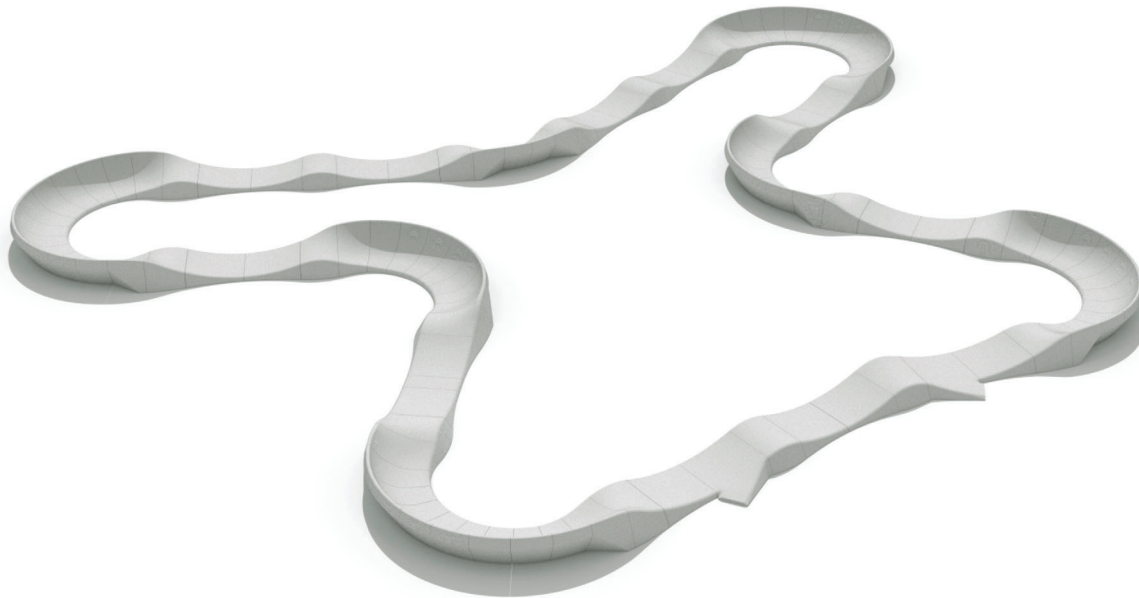

Rideable surface length: 102m

MATERIAL:

Element construction: precast reinforced concrete C35/45
Surface construction: sandblasted concrete
-alternative: resin coating / trowel for concrete
Riding surface: Sika impregnation

CONNECTING MATERIAL:

Connecting bolts: M16 - galvanized, stainless steel (strenght 8.8)
Mounting holes: M16 - part of the shippment (strenght 8.8)

JOINT FILLER :

Flexible sealant SIKAFLEX PRO 3 (change of sealant after the approval of the manufacturer)


CONNECTION COVER:

All connection points must be covered with soil, except for the back-parts of elements T2, T3 and T4.

T1L+R		7+7
T2L+R		7+7
T3L+R		7+7
T4		38
LB1		20
HB1		3
HB2		1
X1+X2L/R		1+1
LG1		1

Colors

 Ral 7035 precast

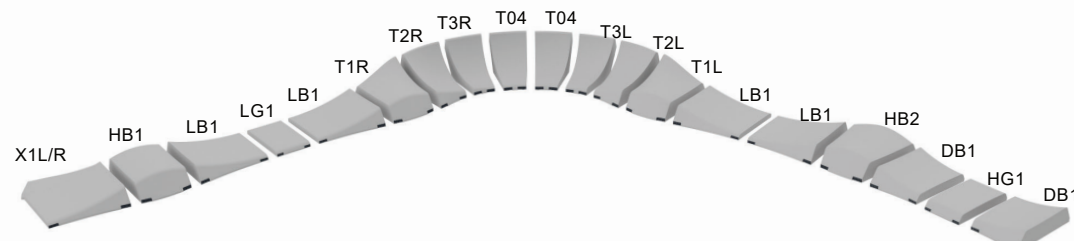

PARKITECT®

Parkitect AG
Reutenenstrasse 22
9042 Speicher, Switzerland
info@parkitect.ch
MWSt - CHE-106.823.064